



Gasoline Engine Full Synthetic Motor Oil Aceite 100% Sintético Motores a Gasolina

MECHA TOOL® FULL SYNTHETIC MOTOR OIL

Mecha-Tool® 100% Synthetic Motor Oil meets all the latest vehicle manufacturer requirements under the API SQ category. **Mecha-Tool® 100% Synthetic Motor Oil** in 0W-20, 5W-20, 5W-30, and 10W-30 meets ILSAC GF-7A Resource Conserving requirements for passenger vehicles. Its formula provides excellent control of deposits caused by high temperatures and helps improve fuel economy. The 0W-20, 5W-20, 5W-30, and 10W-30 grades offer excellent low-temperature fluidity and very low volatility compared with oils meeting other API categories.

Mecha-Tool® 100% Synthetic Motor Oil is formulated with high-quality base oils and modern technology to provide outstanding protection for equipment and machinery in general. **Mecha-Tool® 100% Synthetic Motor Oil** offers:


- Excellent fuel economy.
- Low volatility for reduced oil consumption.
- Excellent protection against deposits caused by operating temperatures.
- Anti-friction formula that helps prevent foam, corrosion, and rust.
- Excellent low-temperature performance.

Mecha-Tool® 100% Synthetic Motor Oil is recommended for the following applications:

- Where API SQ, SP, SN, SM, SL, SJ, SH, SG, SF, SE, SD, or SC oils are required.
- Where MIL-L-46152D and CID A-A-52039B performance levels are required.
- For vehicles requiring GM 6094M, Ford M2C929A, Ford WSS-M2C930-A, M2C153H, or Chrysler MS 6395M specifications.
- Meets the specifications of most domestic and imported vehicles.
- Resource Conserving gasoline engine oil in 0W-20, 5W-20, 5W-30, and 10W-30 grades.
- ILSAC GF-7A certified in all four grades: 0W-20, 5W-20, 5W-30, and 10W-30.
- The 0W-20 grade is DEXOS™ 1 Gen 3™ certified under license D330BAFL170, and the 5W-30 grade is DEXOS™ 1 Gen 3™ certified under license D330AAE1170.

PACKAGING: Case of 12 quarts, case of three 5-quart containers, and 55-gallon drum.

CERTIFICATION GM

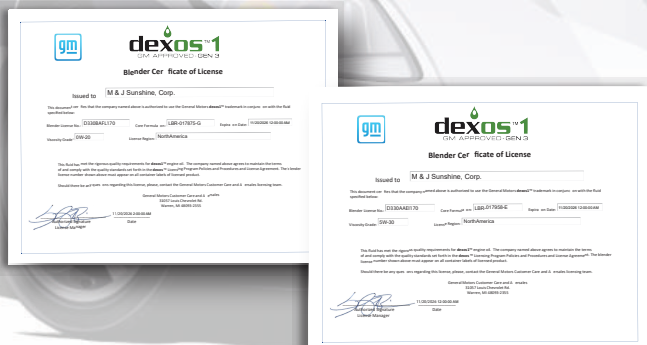

TYPICAL PROPERTIES FULL SYNTHETIC MOTOR OIL

SAE Grade	0W-20	5W-20	5W-30	10W-30
Viscosity cSt at 40°C	47.56	48.71	66.11	63.98
cSt at 100°C	8.90	8.90	11.5	10.53
Viscosity Index	170	165	170	154
Gravity, API	0.8464	0.8466	0.8475	0.8500
Color D1500	2.5	2.5	2.5	2.5
Flash Point °F	204	204	204	207
Pour Point, °C	-47	-44	-37	-38
ILSAC Certification (GF-7A)	YES	YES	YES	YES
Dexos™ 1 Gen 3 Certification	YES	NO *	YES	NO *

* General Motors authorizes Dexos™ 0W-20 to be used in engines that originally use 5W-20 and those that require 10W-30 may use 5W-30.

dexos™ 1
GM APPROVED - GEN 3



Made in U.S.A.

www.mandjsunshine.com/mecha-tool