


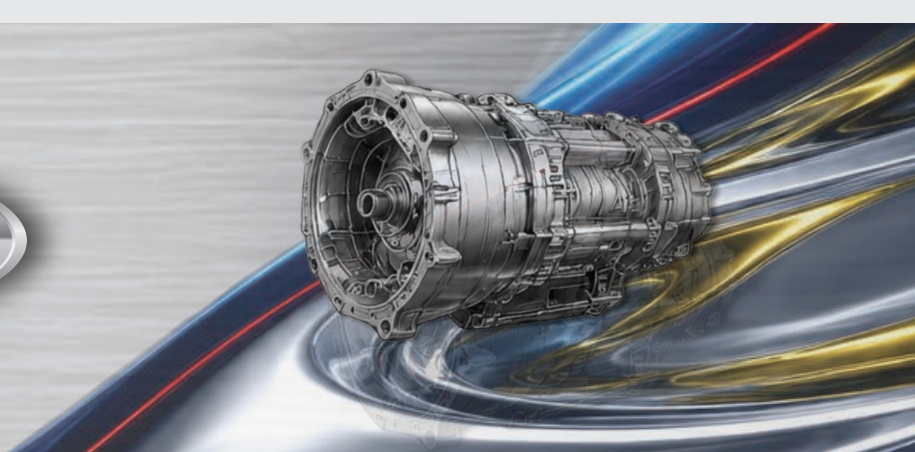

DCT DUAL-CLUTCH TRANSMISSION FLUID

TOPPER® DCT is a fully synthetic, multi-vehicle, high-performance fluid formulated with selected base oils, advanced additives, and viscosity-modifying technology. It is designed for wet dual-clutch transmissions (DCT), providing stable friction, efficient torque transfer, and protection against wear, corrosion, and oxidation.

FEATURES AND BENEFITS

- Fully synthetic formulation with excellent low-temperature fluidity.
- Balanced and long-lasting friction performance for smooth shifting and efficient torque transfer.
- Excellent anti-wear and metal-to-metal protection, as well as protection against yellow-metal corrosion.
- Good load-carrying capacity to protect gears, bearings, and other components.
- High thermal, oxidation, and viscosity stability to help reduce deposits and fluid degradation.

APPLICATIONS AND COMPATIBILITY

Suitable for most wet-clutch DCT transmissions in European, Asian, and American vehicles. Performance levels or references: VW TL 052 182/052 529; BMW DCTF-1; MB 236.21/236.25; Ford/Nissan WSS-M2C936-A/BOT 341; Mitsubishi MZ320065 Dia-Queen SSTF-I; Volvo 1161838/1161839; Peugeot/Citroën 9734.S2; Ferrari TF DCT-F3; Fiat BOT 341; Renault/Getrag BOT 450; and Porsche/ZF applications.

HEALTH, SAFETY, STORAGE AND ENVIRONMENT

Avoid prolonged skin contact and wash exposed areas with soap and water. Keep the container closed in a dry, well-ventilated area, away from contamination, heat, or ignition sources. Do not discharge used oil into the environment; dispose of it through an authorized collection point. Consult the current SDS before handling the product.



PARAMETER	TEST METHOD	UNIT	ATF DCT
Viscosity grade			-
Density at 15 °C	ASTM D1298	kg/L	0.854
Kinematic viscosity at 100 °C	ASTM D445	cSt	7.206
Kinematic viscosity at 40 °C	ASTM D445	cSt	35.98
Viscosity index (minimum)	ASTM D2270	-	169
Brookfield viscosity at -40 °C	ASTM D2983	cP	12,000
Pour point	ASTM D97	°C	-45
Flash point	ASTM D92	°C	210

MADE IN U.S.A.



NOTE: ALWAYS FOLLOW YOUR VEHICLE MANUFACTURER'S LUBRICATION RECOMMENDATIONS.

www.mandjsunshine.com/topper

Manufactured by: M & J SUNSHINE, CORP. Miami, FL 33167/Phone: +1 (305) 888 1155