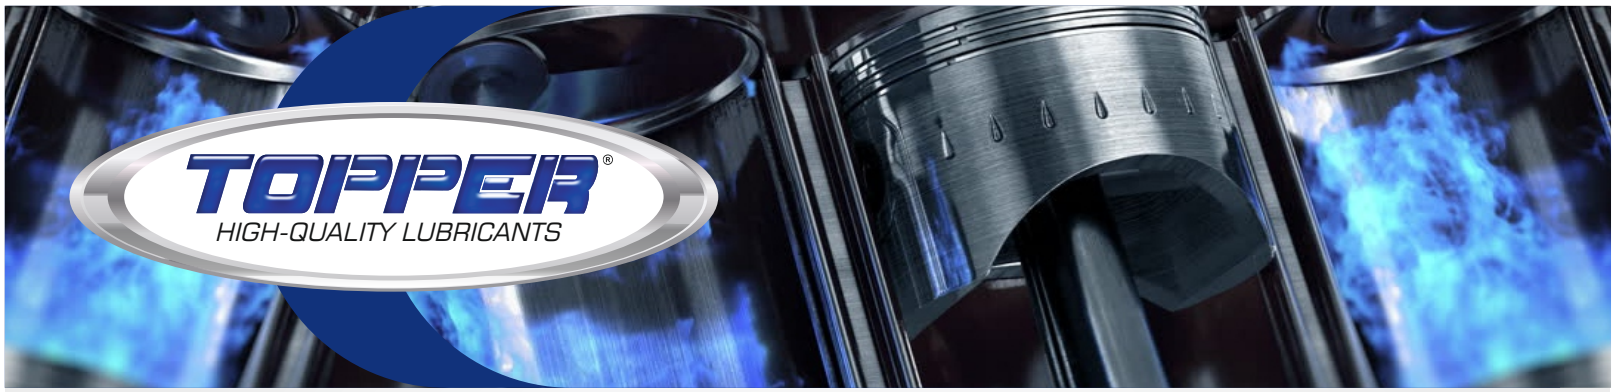

TOPPER® SYNTHETIC BLEND MOTOR OIL API SP

5W-20, 5W-30, 10W-30, 10W-40, 15W-40, 20W-50

Topper® is the new **Synthetic Blend** and detergent formula engineered to provide maximum protection in all weather conditions. **Topper® Synthetic Blend** motor oils meet or exceed all automobile and light duty truck warranty requirements for gasoline and turbocharged engines where API SP, SN, SM, SL and ILSAC GF-6A/GF-5 oils are recommended.

Topper® Synthetic Blend motor oils can be used in place of SN, SL and SJ rated oils.Follow manufacturer's recommendations for viscosity grade and API Service Category.

- Meets or exceeds API Service SP, SN, SL, SJ, SH and ILSAC GF-6A.
- **Topper®** 5W-20, 5W 30 and 10W-30 meet all requirements for **RESOURCE CONSERVING** performance standards.
- Advanced anti-wear formula to help extend engine life.
- High detergency action to help prevent formation of sludge, varnish and rust.
- Enhances fuel economy and high protection against thermal breakdown.

PACKING:
12 quart box, 3 gallon box, 5 quart bottle and 55 gallon drum.

TECHNICAL SPECIFICATIONS

SAE GRADE	5W-20 SYNTHETIC BLEND	5W-30 SYNTHETIC BLEND	10W-30 SYNTHETIC BLEND	10W-40 SYNTHETIC BLEND	15W-40 SYNTHETIC BLEND	20W-50 SYNTHETIC BLEND
Viscosity cSt@40 oC	50.3	67.4	65.4	104.6	104.45	159.89
cSt@ 100 °C	8.90	11.42	10.45	15.74	15.30	19.64
Viscosity Index	159	165	149	161	155	142
Density @156 °C	0.8479	0.8518	0.8550	0.8553	0.8656	0.871
Color D1500	2.5	2.5	2.5	2.5	3.0	3.0
Pour Point, °C	203	205	206	205	205	206
API Service	Licensed for SP and also meets SN, SM, SL, SJ, SH					
Flash Point	-46	-42	-41	-38	-35	-37
ILSAC Certification (GF-6)	YES	YES	YES	NO	NO	NO

**PLEASE NOTE: ALWAYS CONSULT YOUR OWNER'S MANUAL FOR YOUR PROPER FLUID EQUIPMENT.*

MADE IN U.S.A.

www.mandjsunshine.com/topper
Worldwide Represented by: M & J SUNSHINE, CORP. Miami, FL 33166 / FAX: (305) 888 1157